

Disclaimer: This installation guide is intended to clarify the install of your new Soul Performance Products exhaust. Please take proper precautions and safety measures when working on your vehicle and perform this work at your own risk



Please ensure that all components listed below are accounted for before beginning installation:

INCLUDED COMPONENTS

- (2) Valved Exhaust Bypass Pipes
- (1) Valve Controller Kit
- (1) 6MM Bolt
- (1) 5/16 T-Fitting & Adapter

Packing Sign Off _____

Shipped on ____ / ____ / ____




Step 1: Gain access to the engine bay of your vehicle.



Step 2: Locate Switched / Key Hot 12V power source. We use the solenoid under the drivers side intake runner.



Step 3: Test for Switched / Key Hot 12V power source.

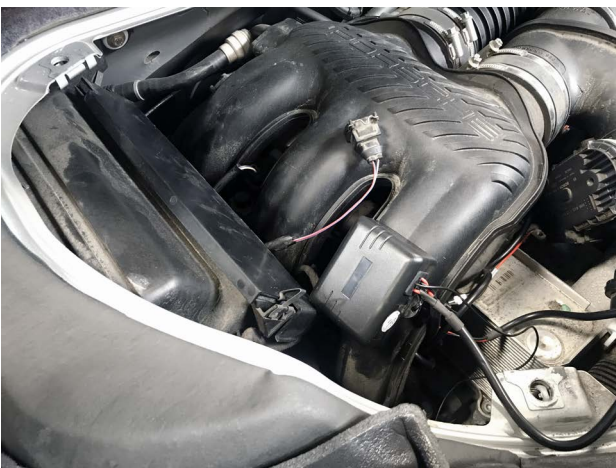

Step 4: Mount valve controller in a safe, dry spot within reach of your power source.



Step 5: Splice in the valve controller power source.





Step 6: Extend the ground wire if necessary to reach a good engine ground such as the location in Step 7.



Step 7: We ground our controller and mount the solenoid with the same included M6 bolt.



Step 8: With the solenoid securely mounted, tap into the 5/16 engine constant vacuum with supplied T connector.

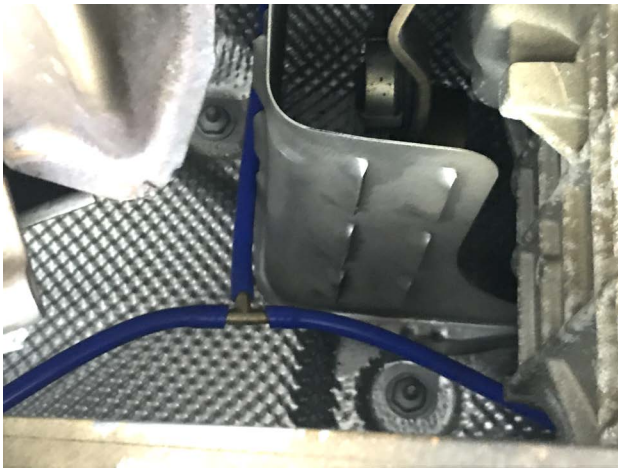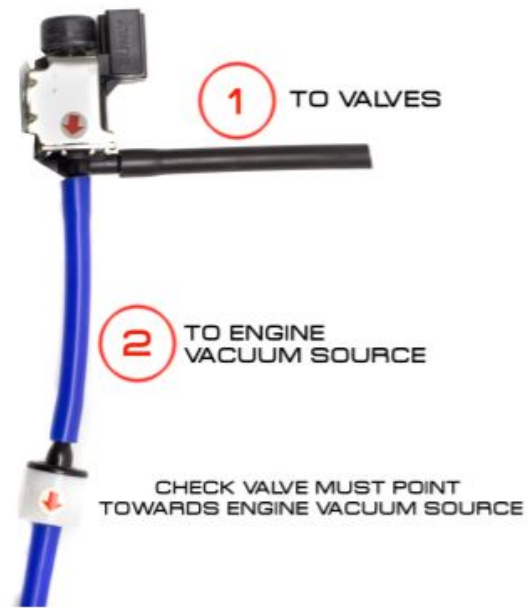

Step 9: Route vacuum line safely down the shift linkage under the car. Split the vacuum line to both exhaust valves with included T.



Step 10: Connect each end of the T'ed off vacuum line to each exhaust valve.

You have now successfully completed the installation of your new Soul Performance Products exhaust components! Thank you for your business and if you have any questions during/after the installation please do not hesitate to call or email at the details below.

⚠ You may find that after your first full heat cycle of the exhaust that you need to re-adjust the tip placement to your liking. Additionally, the tone and sound of your exhaust will likely change as the mufflers get broken in, roughly a thousand miles or so.

⚠ You may notice smoke and fumes coming from the system upon first starting up the vehicle. This is due to oils used in manufacturing and is not a problem. The smell will dissipate in a short period of time after the exhaust has reached normal operating temperature.

SOUL PERFORMANCE PRODUCTS
2300 Maryland Road | Suite B
Willow Grove, PA 19090
(267) 818-3201 | Office
customerservice@soulpp.com